

ECA 100 ipro VZC



Short description

Two-step small room fan with adjustable start delay and overrun time, DN 100

Application examples

Bathroom, WC, Storage room, Larder, Cellar


Article number 0084.0201

Technical data

Model	Adjustable start delay and overrun time
Air flow volume	78 m ³ /h / 92 m ³ /h
Speed controllable	–
Reversing capacity	–
Type of voltage	Alternating current
Rated voltage	230 V
Frequency	50 Hz
Nominal output	6 W / 8 W
I _{max}	0,06 A
Degree of protection	IP X5
Mains cable	5 / 1,5 mm ²
Installation site	Ceiling / Wall
Type of installation	Surface-mounted
Installation position	any
Material	Synthetic material
Colour	Traffic white, similar to RAL 9016
Weight	0,7 kg
Nominal size	100 mm
Airstream temperature at I _{Max}	40 °C
Overrun time	0 min / 8 min / 17 min / 25 min
Start delay	0 s / 50 s / 90 s / 120 s
Sound pressure level	27 dB(A) / 32 dB(A) (Distance 3 m, Free-field conditions)
Range	A
EAN	4012799842019


ECA 100 ipro VZC

Characteristic curve

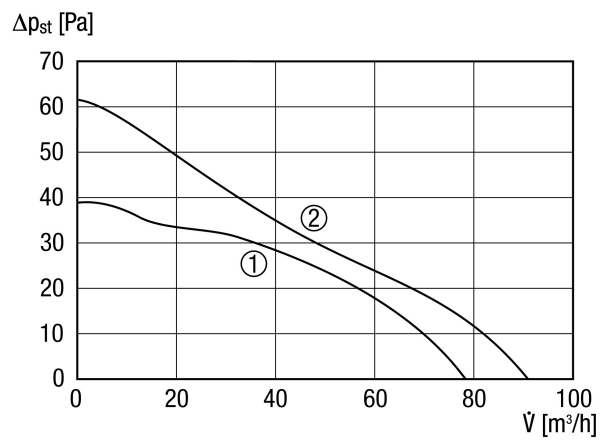

- ① Performance level 1
- ② Performance level 2

Dimensioned drawing [mm]

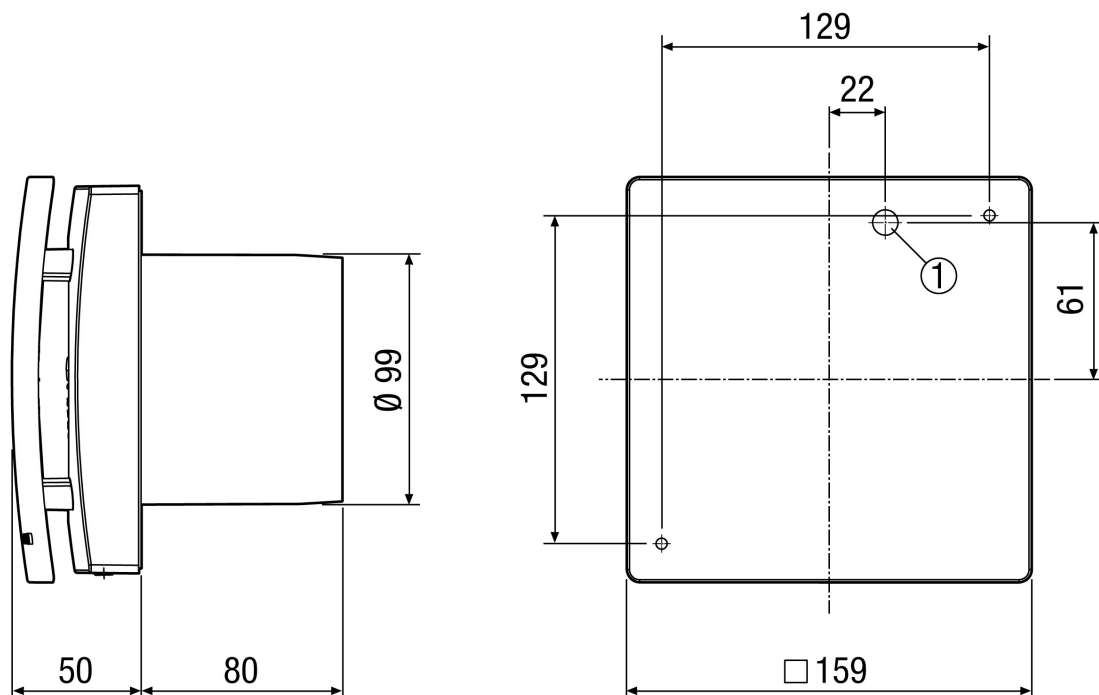

- ① Cable entry