


MODUS KX 6000, 1500mm, 830, opal cover, surface, not dimable, 1400mA, DALI

Code: KX6000L3KO/DALI

EAN: 8596099041045

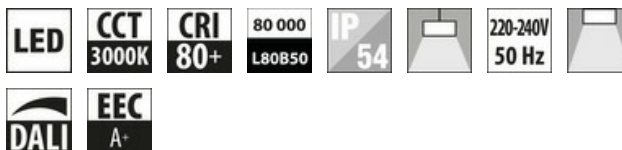

Mechanical properties

Product category:	Ceiling / wall luminaires	Degree of protection (IP):	IP54
Color housing:	White	Suitable for suspended mounting:	Yes
Material housing:	Steel	Suitable for wall mounting:	Yes
Suitable for surface mounting:	Yes	Suitable for ceiling mounting:	Yes

Light source

Lamp type:	LED not exchangeable	Effective luminous flux (lm):	6900
System power (W):	47	Luminaire efficacy (lm/W):	147
Color temperature (K):	3000	Color rendering index CRI:	80-89
Rated life time L80/B50 (h):	80000	With lamp:	Yes
Colour of light:	White	Energy efficiency class of the built-in lamp:	A++, A+, A (LED)

Optical system

Optical system:	KO	Light sharing:	Symmetric
Material cover:	Plastic, opal	Radiation angle:	Extreme wide beam >80°

Dimensions

Length (mm):	1500	Width (mm):	110
Height/depth (mm):	60	Built-in length (mm):	1200
Size version:	L	Weight (kg):	3

Electical properties

Protection class:	I	Connection type:	Pinching contact
Voltage type:	AC	Type of control gear:	LED operating device current-controlled
Nominal voltage (V):	220...240	Control gear included:	Yes
Type of wiring:	Suitable for through wiring	Dimming DALI:	Yes