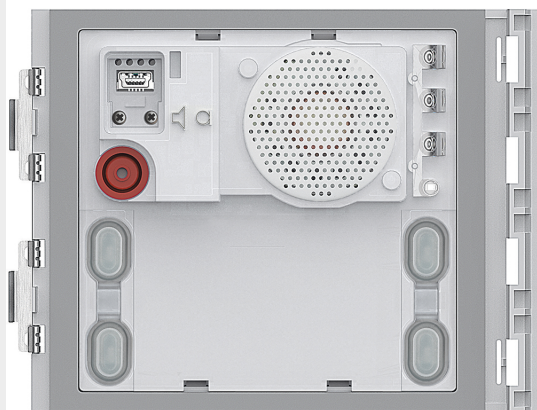**bticino**

BTICINO > Door entry systems > External solution > SFERA entrance panels

351100

Speaker module suitable for 2 wires audio & video systems. Fitted with loudspeaker and microphone volume adjustment. It can manage up to 100 pushbutton calls when using additional double row pushbutton modules. It can be used for opening an electrical door lock directly connected to the S+ and S- clamps (18 V 4 A impulsive - 250 mA holding current 30 Ohm max) and the connection to a local door lock release pushbutton on the PL clamps. Preset for additional power supply. Fitted with front LEDs for the notification of the operating status: door lock release, communication active, call put through, and system busy. Integrated optic sensor for the switching on of the night backlighting. To be completed with surround plate. The device can be confi gured either physically or using the PC and the TiSferaDesign software.

Technical features

Brand	BTicino
N° of modules	1
Height	91 mm
Width	115 mm
Series	Sfera

Documentation

[Technical Data Sheet](#)

[Instruction Sheet](#)

[Software Manual](#)

[DWG drawing](#)

[Catalogue](#)

[Sfera Catalogue](#)

Related products

351122

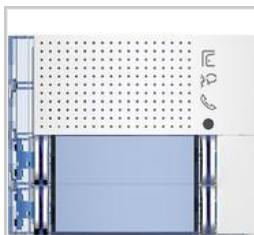Sfera New speaker module front cover, 2 pushbuttons - Allwhite

351105

Sfera New speaker module front cover - Robur

351143

Sfera New speaker module f/cover, 2 pushbuttons on double column - Allstreet


351182

Sfera New speaker module f/cover, 4 pushbuttons on double column - Allwhite

351111

Sfera New speaker module front cover, 1 pushbutton - Allmetal

351123

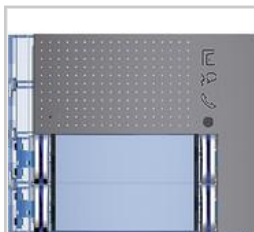Sfera New speaker module front cover, 2 pushbuttons - Allstreet

351102

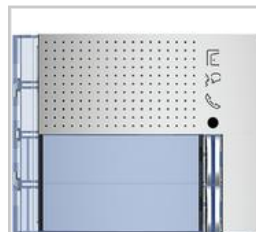Sfera New speaker module front cover - Allwhite

351141

Sfera New speaker module f/cover, 2 pushbuttons on double column - Allmetal

351183

Sfera New speaker module f/cover, 4 pushbuttons on double column - Allstreet

351121

Sfera New speaker module front cover, 2 pushbuttons - Allmetal