


Data sheet | Item number: 210-112 | Wholesaler no: 168300124

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored



www.wago.com/210-112

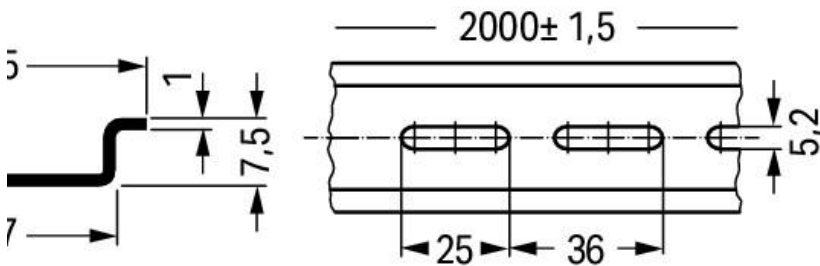

Data

Technical Data

Main product function

Mounting Accessories

Physical data

Width 2000 mm / 78.74 inch

Height 7.5 mm / 0.295 inch

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Depth	35 mm / 1.378 inch
-------	--------------------

Material Data

Color	silver-colored
Weight	630 g

Commercial data

Product Group	2 (Terminal Block Accessories)
Packaging type	BOX
Country of origin	IT
GTIN	4017332272292
Customs tariff number	72169180000

Compatible products

assembling



Item no.: 209-137
Mounting adapter; can be used as end stop; 6.5 mm wide; gray

www.wago.com/209-137



Item no.: 210-148
Angled support bracket; without screw; silver-colored

www.wago.com/210-148



Item no.: 210-149
Screw M 5 x 8; for angled support bracket

www.wago.com/210-149



Item no.: 249-116
Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

www.wago.com/249-116



Item no.: 249-117
Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

www.wago.com/249-117



Item no.: 249-197
Screwless end stop; 14 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

www.wago.com/249-197

General accessories



Item no.: 209-109
Edge guards; for DIN 35 rail (7.5 mm high); gray

www.wago.com/209-109

Marking accessories



Item no.: 210-708
Labels; for TP printers; 9.5 x 25 mm; white

www.wago.com/210-708



Item no.: 210-808
Labels; for Smart Printer; 9.5 x 25 mm; white

www.wago.com/210-808

Subject to changes. Please also observe the further product documentation!



Downloads

Documentation

Bid Text

210-112 docx - Datei	23-Nov-2018	docx 14.9 kB	Download
210-112 X81 - Datei	19-Feb-2019	xml 2.8 kB	Download

CAD/CAE-Data

CAD data

2D/3D Models 210-112	URL	Download
----------------------	-----	----------

CAE data

WSCAD Universe 210-112	URL	Download
ZUKEN Portal 210-112	URL	Download

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



DIN-Rail	Item No.	Current [A]	Acc. to mm ² /AWG _{Cu}
DIN 35 x 7.5 (steel)			
slotted	210-112	76	16/6
unslotted	210-113	76	16/6
DIN 35 x 15 (steel)			
1.5 mm thick	210-114	125	35/2
2.3 mm thick	210-118	125	35/2
DIN 35 x 7.5 (Al)			
unslotted	210-196	76	16/6
DIN 35 x 15 (Cu)			
2.3 mm thick	210-198	309	150/6/0
Current applies to rails of 1 m/3'3" length			

When using standard carrier rails as ground conductor busbars, please refer to the maximum current capacities listed above.

Steel carrier rails are not suited for PEN (ground and N-conductor) applications per EN 60947-7-2 (VDE 0611, Part 3).

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.