Frame Square

Frame Square White 500lm 3000K Ra>80 Trailing edge dimming

Article code: **605241**
EAN: 7021986052411

LED 230V IP66 IK10



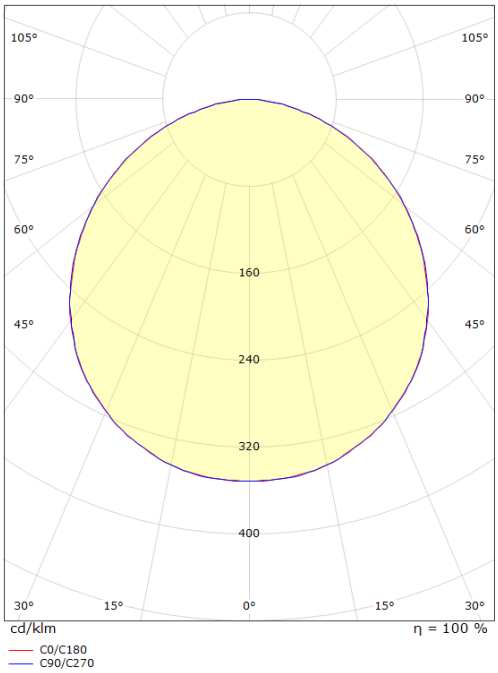

Light technic

Type of light source:	LED (not exchangeable)
Wattage:	6W
System wattage:	6W
Luminous flux:	500lm
Efficacy:	83 lm/W
Voltage:	230V
Colour temperature:	3000K
Colour rendering (CRI):	Ra>80
MacAdams factor:	SDCM: 3
Lifetime:	L80/B20>50,000
Light distribution:	Direct
Optic:	Plastic Opal
Beam angle:	110°

Control/Dimming

Type:	Trailing edge dimming

Protection

Luminaire class:	Class II
Ingress protection rating:	IP66
Vandal class:	IK10
Ta nominel:	Ta=25°C
Fire protection class:	850°C - 30s

Energy and approvals

Energy class:	A++
Approval:	CE

Materials and finish

Housing:	Aluminium
Colour:	White (RAL 9003)
Optics:	Polycarbonat (PC)

Mounting/Connection

Mounting:	Surface, Indoor / Outdoor
Cable entry:	Screwless terminal block
Plug:	Screwless terminal block
Max. luminaires per circuit breaker:	B10: 77, B16: 123, C10: 77, C16: 123

Dimensions (mm)

Length (L):	240
Width (W):	240
Height (H):	77
Weight (brutto/netto):	2.47 / 2.1

Packaging

Packing dimensions:	248 x 248 x 92

7 0 2 1 9 8 6 0 5 2 4 1 1