


RefLED ES50  
RefLED ES50 V6 450LM 830 36 SL  
0029178



- Product features**
- Compact, energy efficient and exceptional value LED GU10 lamp
  - Same shape and size as halogen GU10 lamp
  - Compact Cluster SMD technology enabling high efficiency with halogen look
  - Reduced visible heat sink from the front
  - Available in 36 degree beam angle
  - High lumen efficacy
  - 15,000 hours average rated life
  - 3 years warranty



PRODUCT OVERVIEW

Product name	RefLED ES50 V6 450LM 830 36 SL
Technology	LED
Watt (Rated) (W)	6.2
Type	LED exchangeable
Cap/Base	GU10
Fixture rating	Open
General application	Office, Hospitality, Retail, Education, Residential & Consumer, Museums & Galleries
ETIM Class	EC001959
E-number FI	4741064
Warranty	3 years
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Beam Angle (°)	36
Photobiological Risk Group	RG1
Wattage (W)	6.2
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288291789

DATA TABLE

General data	
Product name	RefLED ES50 V6 450LM 830 36 SL
Technology	LED
Watt (Rated) (W)	6.2
Type	LED exchangeable
Cap/Base	GU10

## RefLED ES50

RefLED ES50 V6 450LM 830 36 SL

0029178

Fixture rating	Open
General application	Office, Hospitality, Retail, Education, Residential & Consumer, Museums & Galleries
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4741064
Warranty	3 years

### Optical data

Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Luminous Intensity (cd)	960
Beam Angle (°)	36
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

### Electrical data

Wattage (W)	6.2
Equivalent watt (W)	60
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
No. Of switching cycles before premature failures	>50000
Dimmable	No
Inrush Current (A)	3.65
Inrush Duration (µs)	4200
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	123
Max. products per 16A B Breaker	74

### Lifetime data

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

### Physical data

Nominal Product Height (mm)	54
Nominal Product Diameter (mm)	50
Weight (kg)	0.035

RefLED ES50  
RefLED ES50 V6 450LM 830 36 SL  
0029178


Packaging

Single packaging type	Carton
Product EAN number	5410288291789
Packaging single length / height (cm)	8.2
Packaging single width (cm)	6.1
Packaging single depth (cm)	5.1
DUN14 (inner)	25410288291783
Units per inner package	6
Packaging inner length / height (cm)	9.2
Packaging inner width (cm)	16.4
Packaging inner depth (cm)	13.1
DUN14 (outer)	15410288291786
Units per outer package	60
Packaging outer length / height (cm)	20.8
Packaging outer width (cm)	17.8
Packaging outer depth (cm)	68.5


Safety data

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

PHOTOMETRY

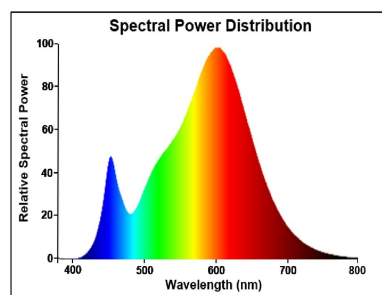

TECHNICAL DRAWINGS




RefLED ES50  
RefLED ES50 V6 450LM 830 36 SL  
0029178

**ENERG**

**SYLVANIA**

0029178

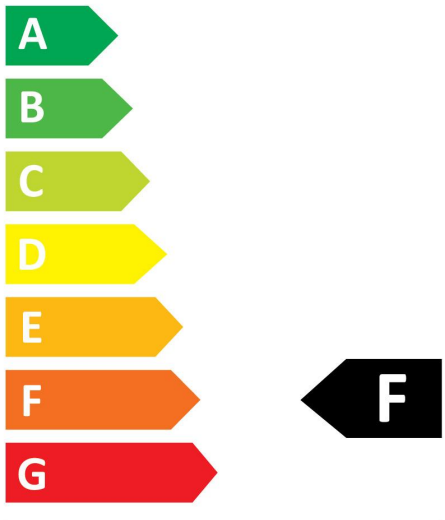


**7**  
kWh/1000h



RefLED ES50  
RefLED ES50 V6 450LM 830 36 SL  
0029178



0029178

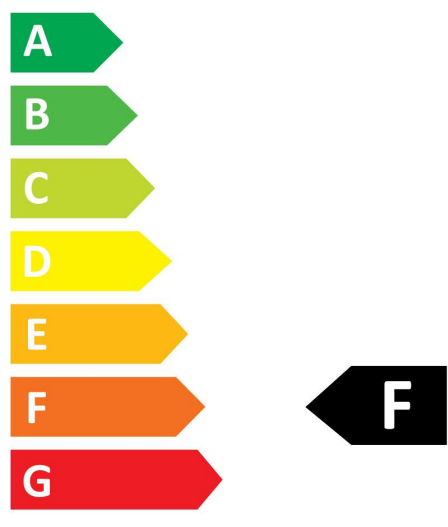

**7**  
kWh/1000h



2019/2015